


Installation Manual on Continuous ink supply system (CISS) For printer Brother LC-09/41/47/900/

Thank you for using the “INKSYSTEM” Continuous ink supply system. It is the best device for an inkjet printer, and it will definitely decrease your printing costs. Before using this system, please read this manual carefully.


I. Inspection & Unpacking

1. Accessories

1) Continuous ink supply system	1
2) Air Filter	1
3) Sponge	1
4) Injector	1
5) Long needle	1
6) Short needle	1
8) Installation Manual	1
9) Certificate on free installation.....	1

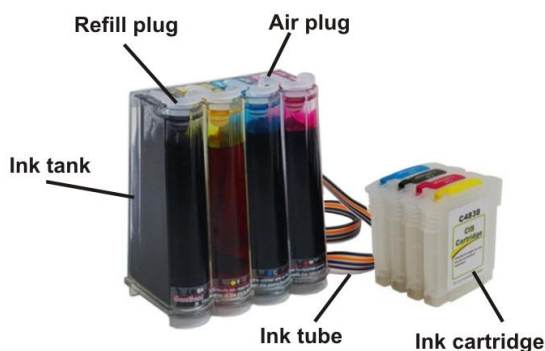

Pic. 1-1

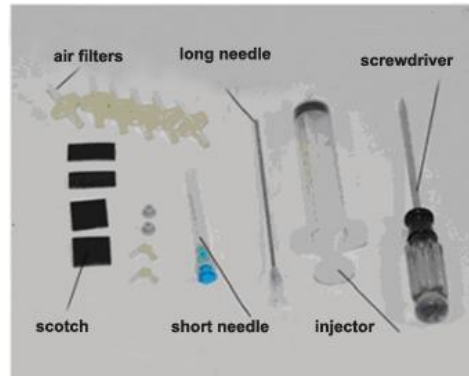

Pic. 1-2


2. Inspection before installation

- A. Check whether all the accessories are present.
- B. Check whether the system is retrieved normally or too much air is remained in the connecting tubes.

II. Test the printer

1. Check the printer's condition to see whether it is normal or not (2-1 and 2-2) and check its mechanics.

2. Print a test sheet to see if the nozzle is normal. If it is abnormal, please clean the print head till nozzle is normal. As for nozzle checking and print head cleaning, please refer to the printer manual.
- 3.

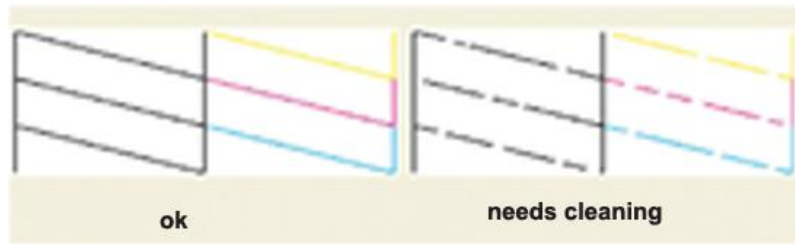

Pic. 2-1, 2-2

3. If printer is alright, please print a picture to see the result.

Note: This system will not cause any damage on your printer.

III. Installation Procedure

1. Get System Ready

Place the system on the right side of printer and tidy up the ink tube (3-1-1). Pull the air plugs out (3-1-2), and replace with air filters and with the bigger side downwards. Keep the air plugs well for next use.



Pic. 3-1-1



Pic. 3-1-2

2. Take the original cartridge out

Open the printer cover (3-2-1), break cartridge clip off (3-2-2), then take out original cartridge separately (3-2-3).



Pic. 3-2-1



Pic. 3-2-2



Pic. 3-2-3

3.Install CISS cartridge

Install and press down cartridge according to the printer indication (3-3-1). Check if the cartridge clip in the right place (3-3-2), tidy up the ink tube and educe ink tube along USB slot (3-3-3).

IV. Refill ink

During printing, if you found out that the ink level in the tank is below the red line, please add ink according to the methods.

V. Check air balance tube

During printing, if you find some abnormal cases, such as bad output, ink drip out on paper, then you need to check the air balance tube to see if exist ink. If yes, please do according to the manual of "ink pump out from balance tube".

VI. Warnings

1. During printing, please do not take cartridges over than the printer. Please keep ink tank and printer in the same level.
2. During printing, do not inverse, lift up or lower ink tanks.
3. Please do not block up ink tanks for curiosity or for fear of less ink
4. Use CISS at clean environment and within the temperature range 15-35 degrees.
5. Please use high-quality ink to prolong and to increase printing quality.
6. During shipment or storage, please do not turn the system over and always have the holes sealed with plugs, to prevent ink leakage.
7. Please do not shake cartridges to avoid leaking.
8. Please do not unplug joint elbow, do not tear off adhesive tape seal that at the bottom of cartridge, do not touch the IC chips that sideways.

VII. Product Warranty

INKSYSTEM warrants its products to be free from defects in material or workmanship. Rarely the equipment partly or completely fails within the warranty period. In these cases we do everything possible to ensure that our customers are satisfied with the purchase.

The INKSYSTEM CISS installation is free in any of the representative offices.

The warranty repairs are done quickly, with good quality and for free. The warranty duration is 12 months from the date of retail sale. Every product has a Warranty Certificate. The transportation of the failed product is provided by its owner.

Please note that the ink and the photo paper are expendable materials and there can be no returning of unsealed ink tanks and photo paper packages. When defects are found by the service managers, a replacement for a new product is performed.

Please adhere to the following points to receive a warranty service as soon as possible:

When accepting the product check if the warranty certificate is filled in correctly.

- Keep the original receipt that contains the date of purchase information.
- Adhere to operating conditions that are provided in the User's Manual, or on the web-page of the specific product.
- Try to avoid mechanical damages when operating the product: chippings, dents, fractures, scratches, etc.
- Demonstrate the failed device to the service center managers (the warranty repair or replacement can be provided only upon the failed product availability).
- Ensure that the service center gets the product with its full set: descriptions, chips, tubes, etc.

Warranty certificate

<p>(Product)</p> <p>Continuous ink supply system</p> <p>(Model Name)</p> <p>_____</p> <p>(Serial No)</p> <p>_____</p> <p>(Date of Purchase)</p> <p>_____</p> <p>(Warranty Period)</p> <p>1 year from the date of retail purchase</p>	<p>Seller company</p> <p>_____</p> <p>SEAL</p> <p>_____</p>
---	---

The warranty conditions are agreed and accepted. No claims against the product appearance and the list of equipment.

Customer's signature